


CARCASS DRESSING CONVEYOR



Which is mainly used to assist cattle carcass processing on the conveyor rail for breast pre-skinning, skin removal, breast opening, viscera removal, and so on.

Rated voltage	380VAc
Controlli voltage	24VDc
Driving power	2.2Kw
Air consumption	5L/Time
The conveying speed is fixed, and the working position stop time is adjustable	
Distance of working position	2400mm
Air cylinder	EB-215-215
Hoist cylinder	TQGA-160X50-FA

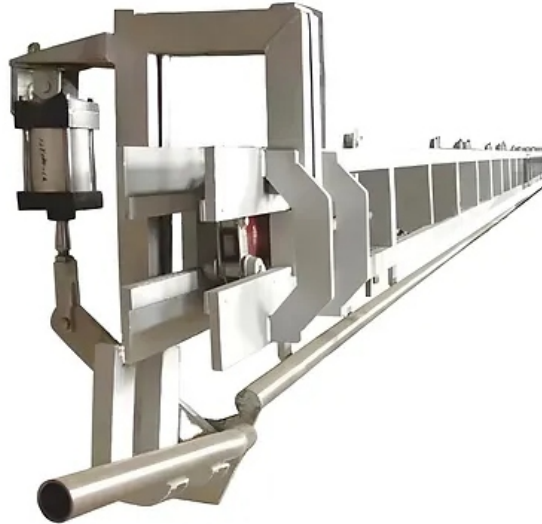

HEADQUARTER

PT ARSI INDO GRAHA
INDONESIA

+6281270762750
info@arsiindograha.com
www.arsiindograha.com

GLOBAL OFFICE


RC INDO GROUP LIMITED
RWANDA

+250793885693
info@rcrwanda.com
www.rcrwanda.com

ARSYI GLOBAL L.L.C-FZ
DUBAI

+971507169760
info@arsyi.com
www.arsyi.com

CARCASS DRESSING CONVEYOR

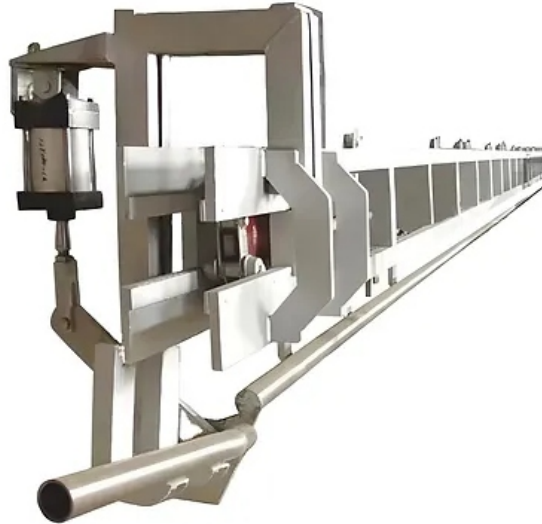

Alat ini terutama digunakan untuk membantu proses pengolahan karkas sapi pada conveyor rail, seperti pengulitan awal pada bagian dada, pengulitan, pembukaan karkas pada bagian dada, pengeluaran jeroan, dan proses lainnya.

Rated Tegangan	380VAc
Kontrol Tegangan	24VDc
Daya Penggerak	2.2Kw
Konsumsi Udara	5L/Time
Kecepatan pengangkutan tetap, dan waktu henti pada posisi operasional dapat disesuaikan.	
Jarak Posisi Operasional	2400mm
Air cylinder	EB-215-215
Hoist cylinder	TQGA-160X50-FA



HEADQUARTER

PT ARSI INDO GRAHA
INDONESIA

+6281270762750
info@arsiindograha.com
www.arsiindograha.com

GLOBAL OFFICE

RC INDO GROUP LIMITED
RWANDA

+250793885693
info@rcrwanda.com
www.rcrwanda.com

ARSYI GLOBAL L.L.C-FZ
DUBAI

+971507169760
info@arsyi.com
www.arsyi.com